



OTEXIO

USER MANUAL AND MAINTENANCE RCOVER BOX SYSTEM

Date of creation : 08/04/24

Author : Remy MARTIN

Version : V.1


Date of update :

Subject of the update :

1. Operating mode :

To activate the system :

- 1) Unlock the safety by pulling on the lock and then rotating it a quarter turn so that it remains in the « pulled » position :

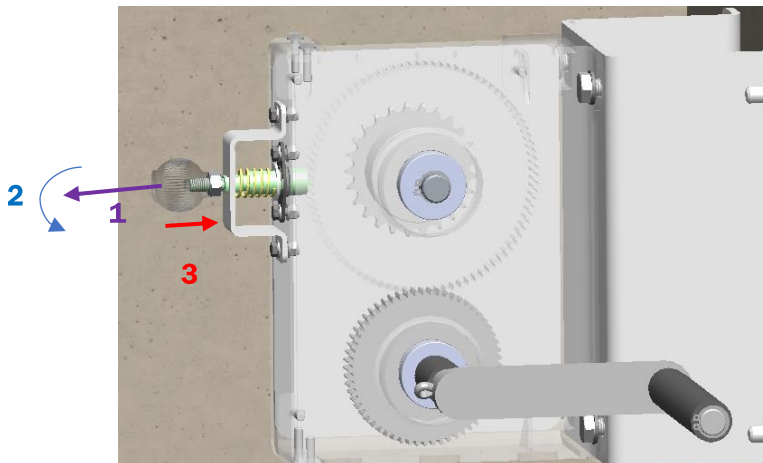

- 2) Turn the crank in the desired direction to fold or unfold the system.
- 3) Lock the system by operating the lock (pull → turn a quarter turn → push) so that it is in its "pushed" position and locks the crank.

2. Maintenance instructions :

To ensure a good lifespan and proper use of the system, it is recommended to perform the following operations at least once a year:

- Lubrification of all transmission chains with WD40 (no grease).
- Lubrification of the bearings of the elements with gears/bearings, and at the ends of the hoops, using WD40.
- Clean the top of the walls to prevent debris or objects from obstructing the passage of the hoops.
- Check that the rails have not been impacted to the extent that they deform and block the rolling of the hoops.

WARNING: In case of the risk of heavy snowfall, it is recommended to fold the system to avoid damaging the tarp and the hoops. If snow has accumulated on the unfolded system, remove it before folding the system.